


T. Pressure Transmitters

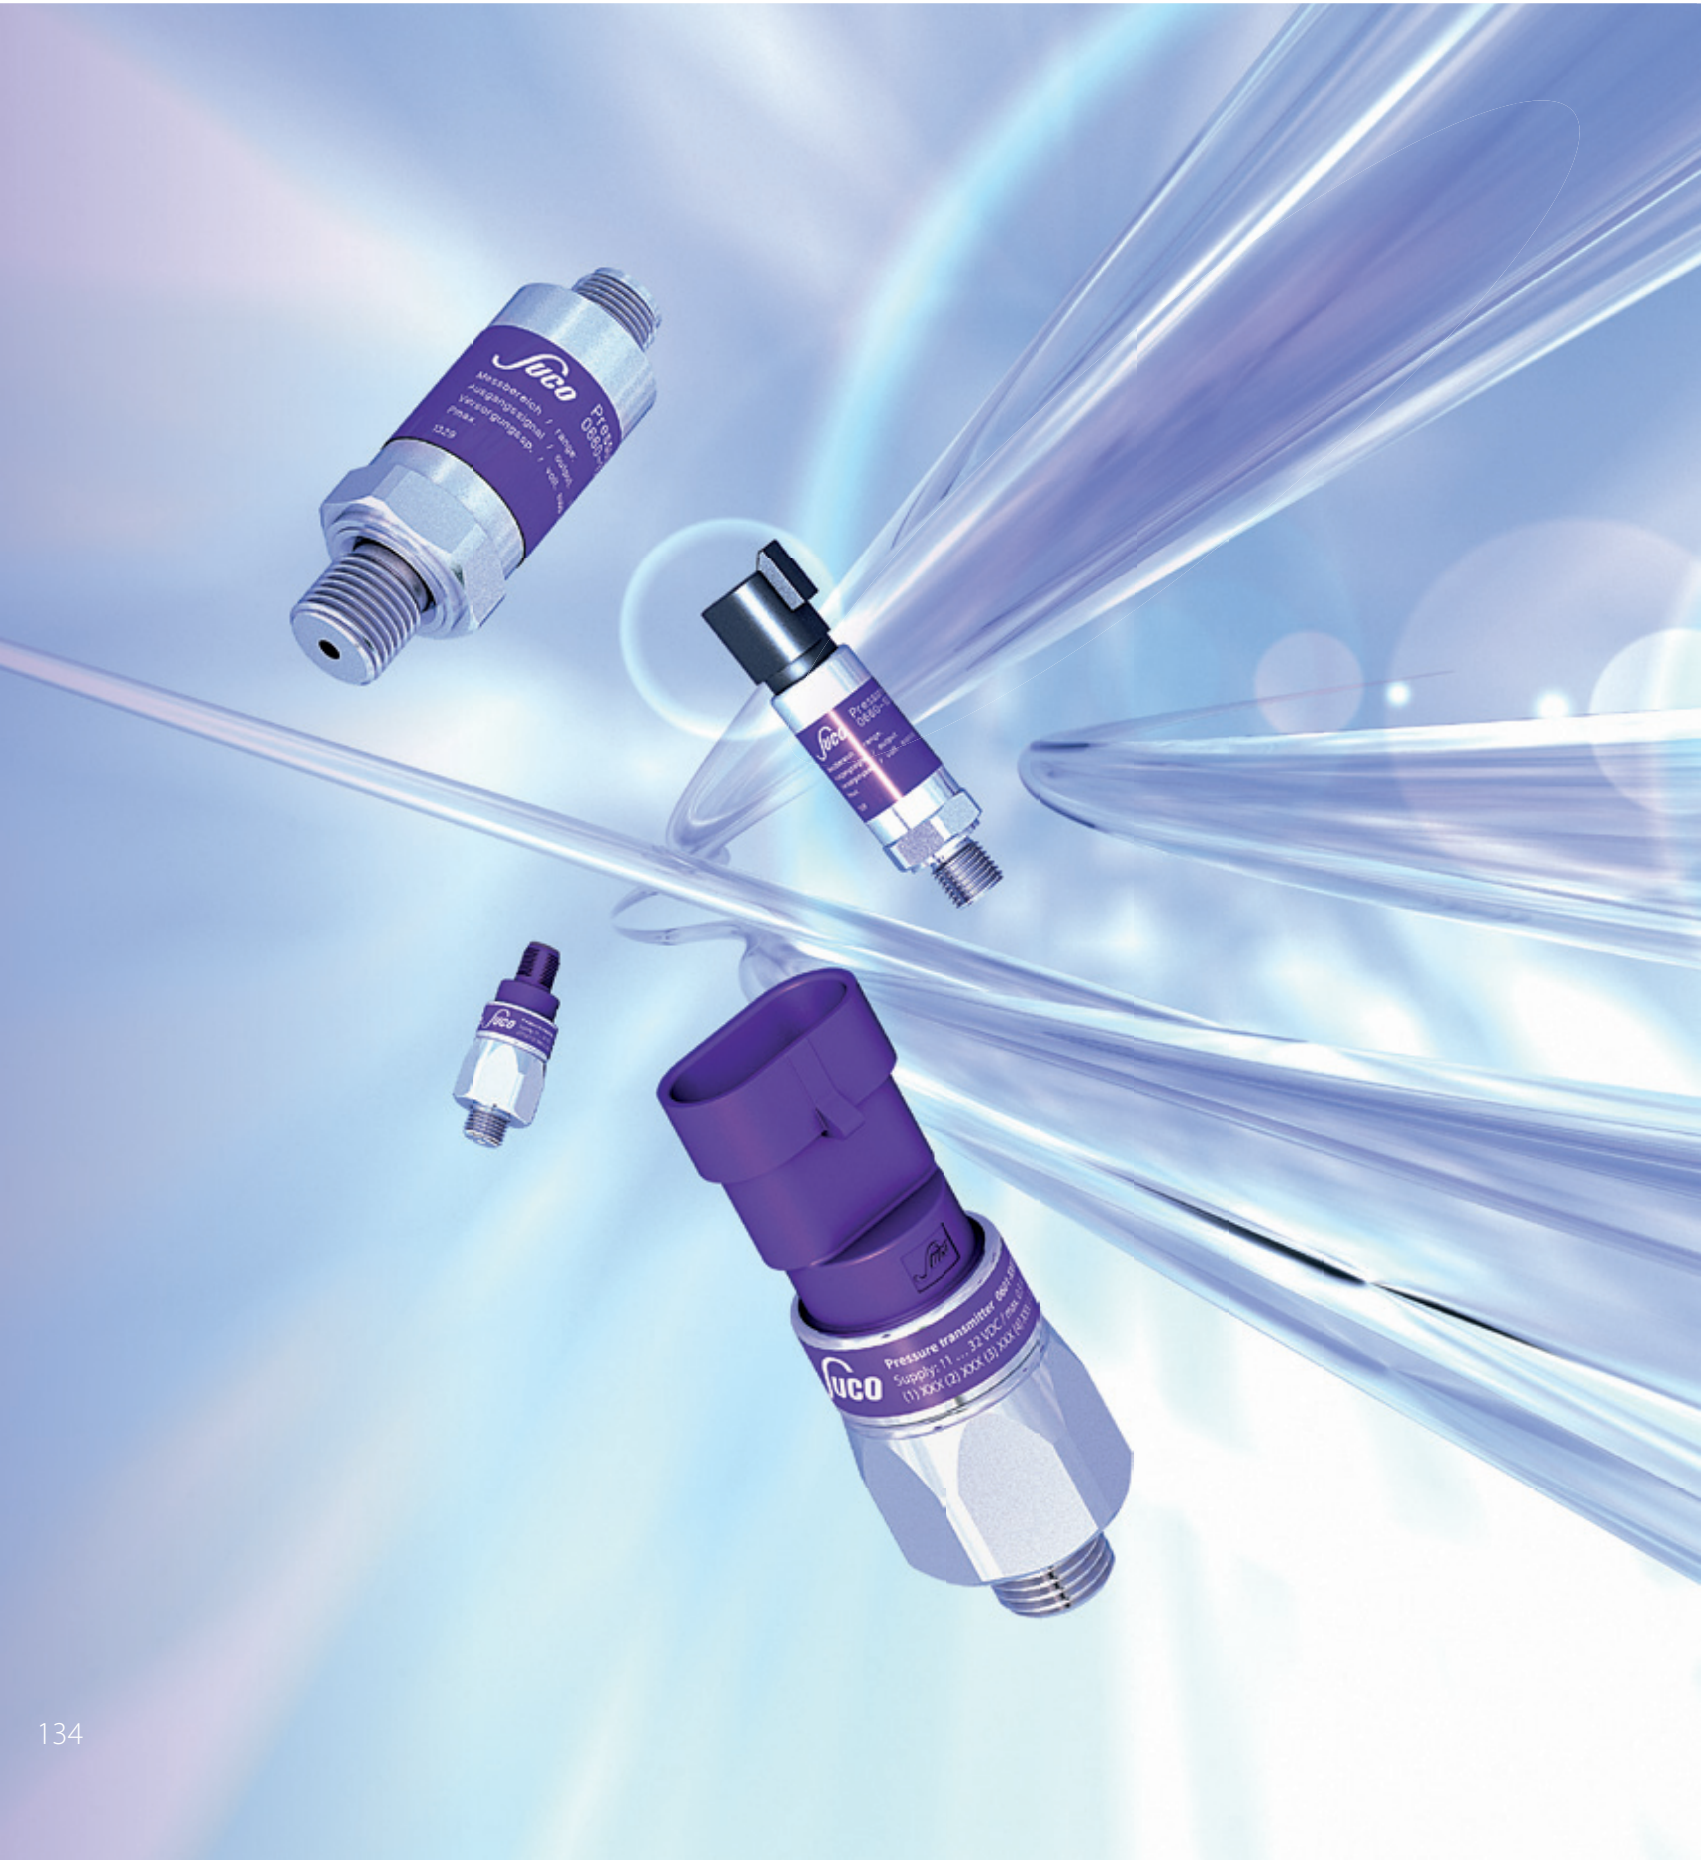

T.3

hex 22
Stainless steel
1.4404 / AISI 316L

Robust pressure transmitters

Stainless steel housing 1.4404 / AISI 316L, hex 22



- Pressure transmitters specially for low pressures, including vacuum applications
- Long life time even under high pressure change rates
- Housing and wetted parts are made of stainless steel 1.4404 providing excellent media compatibility when used in seawater, chemical and process technology applications
- The highly-sensitive piezo-resistive sensor in the measuring cell filled with oil guarantees high level of accuracy, repeatability and long-term stability
- The availability of different sealing materials enables deployment in a broad temperature range and with a diverse array of media

Robust pressure transmitters

Technical details

Type:	0675	0680	0690
Output signal:	0.5 - 4.5 V ratiometric	0 - 10 V (3-wire)	4 - 20 mA (2-wire)
Supply voltage U_{V+} :	5 VDC \pm 10 % max. 6,5 VDC	12 - 32 VDC	10 - 32 VDC
Permissible load apparent ohmic resistance:	$\geq 4.7 \text{ k}\Omega$	$\geq 4.7 \text{ k}\Omega$	$\leq (U_{V+} - 10 \text{ V}) / 20 \text{ mA}$
Idle power consumption:	approx. 5 mA		< 4 mA

Type:	0675 / 0680 / 0690							
Standard pressure ranges p_{nom} :	-1 - 0 bar (vacuum)	0 - 1 bar	0 - 4 bar	0 - 6 bar	0 - 10 bar	0 - 16 bar	0 - 40 bar	0 - 100 bar
Overpressure protection $p_u^{1)}$:	3 bar	3 bar	8 bar	12 bar	20 bar	32 bar	80 bar	200 bar
Burst pressure ¹⁾ :	10 bar	10 bar	20 bar	30 bar	35 bar	40 bar	100 bar	250 bar
Mechanical life expectancy:	10,000,000 pulsations at rise rates to 1 bar/ms at p_{nom}							
Permitted pressure change rate:	$\leq 1 \text{ bar/ms}$							
Accuracy:	$\pm 0.5 \%$ full scale (FS) at room temperature, $\pm 0.25 \%$ BFSL							
Langzeitstabilität:	$< \pm 0.2 \%$ of full scale (FS) per year							
Wiederholgenauigkeit ²⁾ :	$\pm 0.1 \%$ FS							
Temperature error ²⁾ :	$\pm 0.02 \%$ of full scale (FS) / °C; -1 ... 1 bar $\pm 0.03 \%$ of full scale (FS) / °C							
Compensated temperature range:	-10 °C ... +70 °C (14 °F ... 158 °F)							
Temperature range ambient:	-40 °C ... +100 °C (-40 °F ... 212 °F)							
Temperature range media:	with NBR seal: -40 °C ... +100 °C (-40 °F ... +212 °F)							
	with EPDM seal: -30 °C ... +125 °C (-22 °F ... +257 °F)							
	with FKM seal: -20 °C ... +125 °C (-4 °F ... +257 °F)							
Wetted parts material	Housing:	Stainless steel 1.4404 (AISI 316L)						
	Measuring cell:	Stainless steel 1.4404 (AISI 316L)						
	Seal material:	NBR, EPDM or FKM						
Standard sensor oil:	Fluorine oil (not suitable for food applications)							
Insulation resistance:	$> 100 \text{ M}\Omega$ (500 VDC, $R_i > 42 \Omega$)							
Response time 10 - 90 %:	$\leq 2 \text{ ms}$							
Vibration resistance:	20 g at 4 - 2000 Hz sine wave; DIN EN 60068-2-6							
Shock resistance:	half sine wave 500 m/s ² ; 11 ms; DIN EN 60068-2-27							
Protection class	Refer to the electrical connections							
Electromagnetic compatibility:	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007							
Max. length of connection cable:	30 m							
Protection against reverse polarity, short-circuit and overvoltage:	Built-in							
Weight:	approx. 80 g (DIN EN 175301 approx. 110 g, cable output approx. 135 g)							

¹⁾ Static pressure. Dynamic value is 30 to 50% lower. Values refer to the hydraulic/pneumatic part of the pressure transmitter.

²⁾ Within the compensated temperature range.



T.3

hex 22
Stainless steel
1.4404 / AISI 316L



0675 / 0680 / 0690

Electrical connectors and threads

DIN EN 175301 - 803 - A

Pin	0675 / 0680	0690
1	U _{v+}	U _{v+}
2	Gnd	I _{out}
3	U _{out}	nc
PE		

IP65

x ~ 60 mm without coupler socket
x ~ 76 mm with coupler socket

d ~ Ø 30 mm

Order number: 013

M12 - DIN EN 61076 - 2 - 101 A

Pin	0675 / 0680	0690
1	U _{v+}	U _{v+}
2	U _{out}	nc
3	Gnd	I _{out}
4	nc	nc

IP67

x ~ 54 mm

d ~ Ø 22 mm

Order number: 002

ISO 15170 - A1 - 4.1

Pin	0675 / 0680	0690
1	U _{v+}	U _{v+}
2	Gnd	nc
3	U _{out}	I _{out}
4	nc	nc

IP67

x ~ 65 mm

d ~ Ø 27 mm

Order number: 004

Cable connection

1: red
2: white
3: black

Pin	0675 / 0680	0690
1	U _{v+}	U _{v+}
2	U _{out}	nc
3	Gnd	I _{out}

IP67

x ~ 44 mm (+ 20 mm bend relief)
Cable length ~ 2 m

d ~ Ø 22 mm

Order number: 011

Thread code: 41

0675 / 0680 / 0690

Order matrix for pressure transmitters

T.3

hex 22
Stainless steel
1.4404 / AISI 316L



	Type	Pressure range	Pressure connection	Seal material	Electrical connection
--	------	----------------	---------------------	---------------	-----------------------



0.5 - 4.5 V ratiometric	0675
0 - 10 V, 3-wire	0680
4 - 20 mA, 2-wire	0690

Pressure range	Max. Overpressure ¹⁾	
-1 - 0 bar (Vacuum, approx. -29.6 inHg)	3 bar	000
0 - 1 bar (approx. 14.5 PSI)	3 bar	100
0 - 4 bar (approx. 58 PSI)	8 bar	400
0 - 6 bar (approx. 87 PSI)	12 bar	600
0 - 10 bar (approx. 145 PSI)	20 bar	101
0 - 16 bar (approx. 232 PSI)	32 bar	161
0 - 40 bar (approx. 580 PSI)	80 bar	401
0 - 100 bar (approx. 1,450 PSI)	200 bar	102



Pressure connection	
G1/4 - DIN EN ISO 1179-2 (DIN 3852-11), form E	41



Seal material - Application areas

NBR:	Hydraulic/machine oil, heating oil, air, nitrogen, water, etc.	-40 °C ... +100 °C (-40 °F ... +212 °F)	1
EPDM:	Brake fluid, water, acetylene, hydrogen, etc.	-30 °C ... +125 °C (-22 °F ... +257 °F)	2
FKM:	Hydraulic fluids (HFA, HFB, HFD), petrol/gasoline, etc.	-20 °C ... +125 °C (-4 °F ... +257 °F)	3



Electrical connection

DIN EN 175301-803-A (DIN 43650-A); socket device included	013
M12x1 - DIN EN 61076-2-101 A	002
Bayonet ISO 15170-A1-4.1 (DIN 72585-A1-4.1)	004
Cable connection (length of cable 2 m standard)	011



Order number:	06XX	XXX	41	X	XXX
----------------------	-------------	------------	-----------	----------	------------

¹⁾ Static pressure, dynamic pressure 30 to 50% lower. Values refer to the hydraulic or pneumatic part of the pressure transmitter.

